



RELECO[®]
Since 1987
An ISO 9001:2015 Certified Company

Head Office:- B-30/6, Jhilmil Industrial Area, Delhi-110095,
Work:- 439, Pathan Pura, Bada Bazar, Shahdara, Delhi-110032
Phone No.:- +91 98112 22748, 9999469096, 90133 54416
E-mail:- rkrelcoind@yahoo.co.in
Web:-www.relcoindustries.com

www.relcoindustries.com



RELECO[®]

Since 1987

An ISO 9001:2015 Certified Company

WIRES & CABLES | LIGHTING | FANS
ELECTRICAL ACCESSORIES



Aerodynamically
YOURS

ABOUT US

INTRODUCING, TRUE MASTERPIECES THE STORY OF PERFECTION IN MOTION

RELCO is a well known ISO:9001 : 2008 certified company. Based at Delhi, India, we commenced our organization in the year 1987 with a mission to strictly follow client centric approaches throughout our business activities. In 1987 Relco Industries was launched to manufacture cable and starters of world class standards. The Relco industries denotes "best quality at lowest price".


At Relco industries, we are aware that our customers face immense competition. Our operation effectiveness affect our customer's business performance directly. We believe that the competitive edge can be obtained by providing goods of exceptional quality and timely delivery. To achieve consistent quality, each and ever coil of our cables is tested to ensure the amount of copper used is as per company standards.

Our successful businesses establishment rests on certain parameters such as customization of products and stringent quality checks that helps us to acquire a long of clientele in the Indian & Global market.



FANS
03 - 11

CONTANT

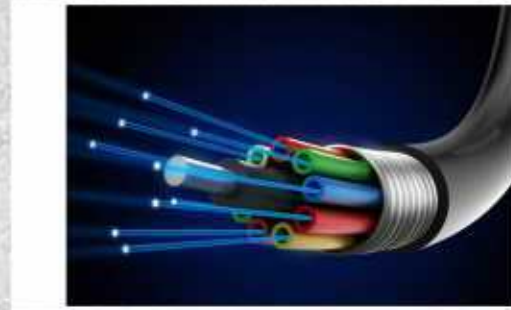

WIRES
14 - 24



ARCHITECTURAL LIGHTS
27 - 38





INDUSTRIAL LIGHTS
40 - 45



COMMERCIAL LIGHTS
47 - 48



INDOOR LIGHTS
51 - 70

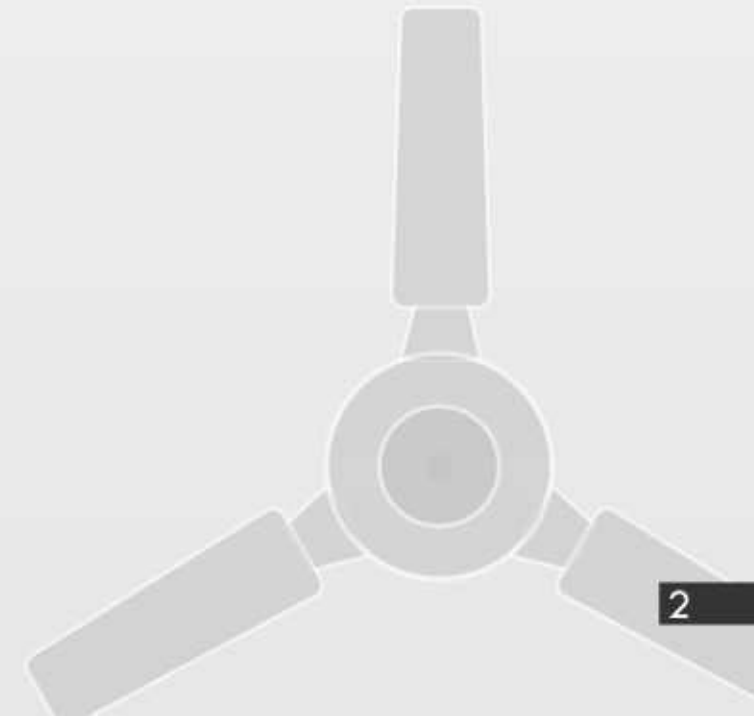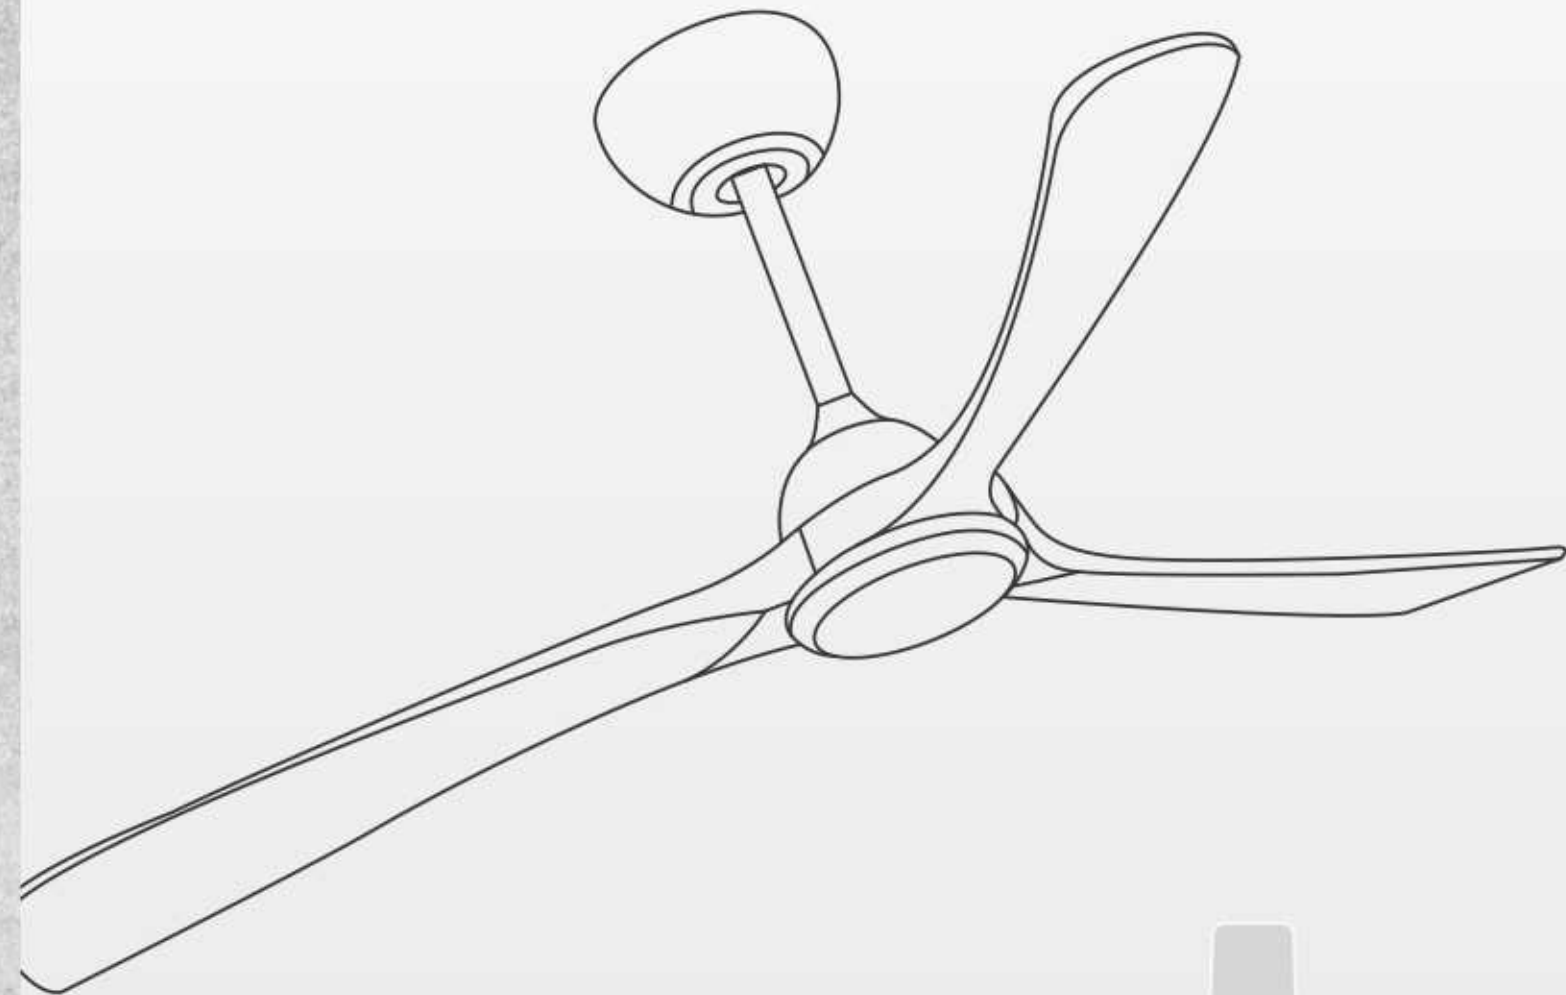



TECHNOLOGICAL REVOLUTION







AURA


CEILING FAN

The Aura ceiling fan has premium appearance and finish of Aura, compliments any décor beautifully. Fresh, stylish and minimal design supremely cools the space around it in an extremely quick time.

COLOURS AVAILABLE

Smoke Brown 

Glossy White 

Ivory 

PRODUCT HIGHLIGHTS

- Amazingly efficient
- Exceptional Air flow
- Stylish design
- 2 years warranty
- High speed

ITEM CODE	COLOR	WATTAGE	SPEED	SWEEP SIZE
BC_AURA_SB	Smoke brown	70 watts	390 rpm	1200MM
BC_AURA_GW	White	70 watts	390 rpm	1200MM
BC_AURA_IV	Ivory	70 watts	390 rpm	1200MM





ENTICER

CEILING FAN

The sophisticated and bold Enticer ceiling fan is as good as it looks. Its rich and exotic look makes it an apt choice for modern home and offices. With its metallic finishes on the blades and around the motor, it can enhance the vibe of any room.

COLOURS AVAILABLE


Smoke Brown 

White 

PRODUCT HIGHLIGHTS

- Exotic rich look
- High grade copper
- Bold design for modern home
- Exceptional Air flow
- Amazingly efficient
- 2 years warranty

ITEM CODE	COLOR	WATTAGE	SPEED	SWEEP SIZE
BC_ENT_SB	Smoke brown	65 watts	360 rpm	1200MM
BC_ENT_W	White	65 watts	360 rpm	1200MM





PRIDE

CEILING FAN

Don't be deceived by the simplicity and minimal design of the Pride ceiling fan. True to its name, the powerful motor and efficient blades ensures quick and efficient cooling. Available in multiple color options, with long lasting paint coated finish, lends itself to almost any room. It is a perfect example for optimum performance and discreet elegance.

COLOURS AVAILABLE

- Smoke Brown 
- Gloss Brown 
- Glossy White 
- Ivory 

PRODUCT HIGHLIGHTS

- Clean Sophisticated look
- High grade copper
- Exceptional Air flow
- Amazingly efficient
- 2 years warranty

ITEM CODE	COLOR	WATTAGE	SPEED	SWEEP SIZE
BC_PRD_GB	Glossy brown	70 watts	390 rpm	1200MM
BC_PRD_GW	Glossy White	70 watts	390 rpm	1200MM
BC_PRD_IV	Glossy Ivory	70 watts	390 rpm	1200MM
BC_PRD_SB	Smoke brown	70 watts	390 rpm	1200MM



*Finding
the right ceiling fan
for your room*



JOSH

CEILING FAN

The Josh ceiling fan is made for sleek exquisite presence on your ceilings. These aerodynamically balanced fans are both pleasing to the eye as well as pleasure to use. Its decorative finish on the blade and motor provides an extra dimension to your interiors.

PRODUCT HIGHLIGHTS

- Exceptional Air flow
- Amazingly efficient
- Rich trendy look
- Design that compliments room decor
- 2 years warranty
- High speed

ITEM CODE	COLOR	WATTAGE	SPEED	SWEEP SIZE
BC_JOSH_SB	Smoke brown	70 watts	390 rpm	1200MM
BC_JOSH_W	White	70 watts	390 rpm	1200MM
BC_JOSH_IV	Ivory	70 watts	390 rpm	1200MM



STAR

CEILING FAN

Beautifully crafted, the shimmering Star ceiling fan is a classic combination of premium embellishments on the motor with uniquely designed decorative trims on the blades. The star adds a dash of poise to the overall presence. It livens up the room and your spirits.

COLOURS AVAILABLE

- Smoke Brown
- White
- Ivory

PRODUCT HIGHLIGHTS

- Aerodynamically designed blades
- High grade copper
- Elegant design
- Exceptional Air flow
- Amazingly efficient
- 2 years warranty

ITEM CODE	COLOR	WATTAGE	SPEED	SWEEP SIZE
BC_STAR_SB	Smoke brown	70 watts	390 rpm	1200MM
BC_STAR_W	White	70 watts	390 rpm	1200MM
BC_STAR_IV	Ivory	70 watts	390 rpm	1200MM






AVENCER

CEILING FAN

The Avencer ceiling fan is an example of contemporary design with stylish and classy decorative trims on motor and blades. It is a refreshing new design that ensures superior air delivery while complimenting your décor. You cannot take your eyes off its beautiful sleek design.


COLOURS AVAILABLE

- Smoke Brown 
- Caramel Brown 
- White 

PRODUCT HIGHLIGHTS

- Elegant look with stylish decoratives
- High grade copper
- Exceptional Air flow
- Amazingly efficient
- 2 years warranty

ITEM CODE	COLOR	WATTAGE	SPEED	SWEEP SIZE
BC_AVE_SB	Smoke brown	65 watts	360 rpm	1200MM
BC_AVE_CB	Caramel brown	65 watts	360 rpm	1200MM
BC_AVE_W	White	65 watts	360 rpm	1200MM

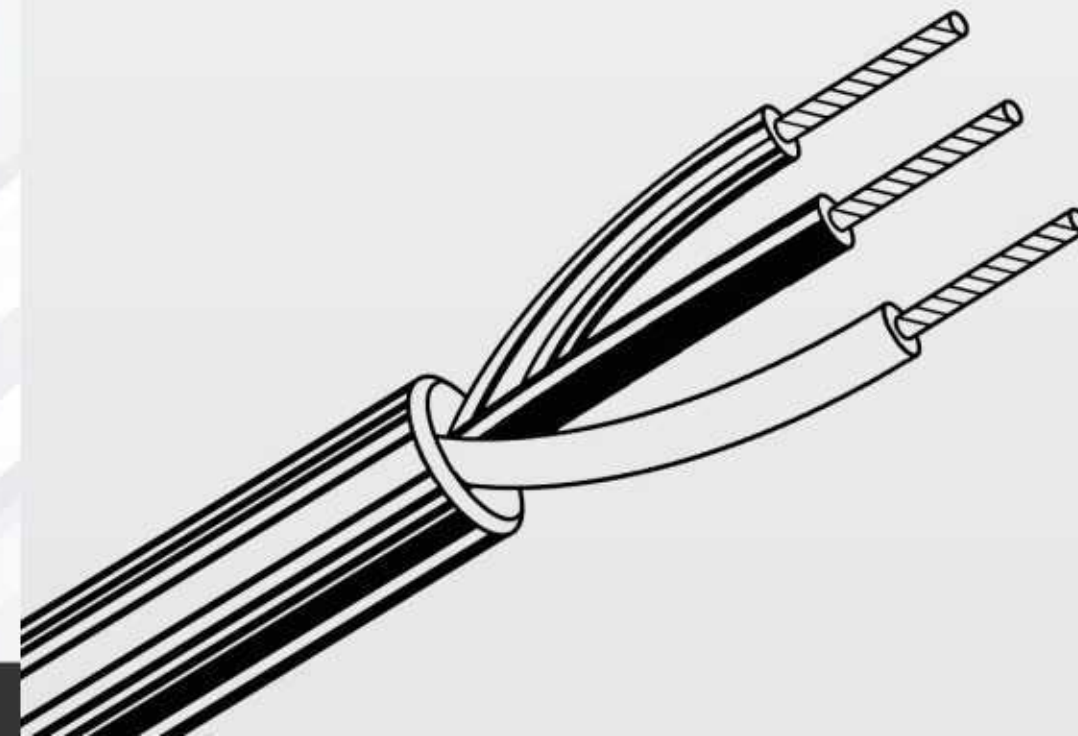

ELECTRIC POWER

*Pain Reaches The
Heart With
Electrical Speed,
But Truth Moves
To The Heart
As Slowly
As A GLACIAR*

MULTISTRAND

These wires are also ideal for indoor- and outdoor-applications and building electrification in various industries, household appliances such as power-supply for refrigerators and air conditioners.



S No.	Conductor Size	Coils Per Carton	No. of Strands	Current Rating (Ampere)
1	0.75sq.mm	24 coils	10 strands	7 A
2	1sq.mm	24 coils	14 strands	12 A
3	1.5sq.mm	24 coils	22 strands	16 A
4	2.5sq.mm	12 coils	36 strands	22 A
5	4sq.mm	12 coils	56 strands	29 A
6	6sq.mm	6 coils	84 strands	38 A
7	10sq.mm	6 coils	140 strands	51 A
8	16sq.mm	3 coils	224 strands	69 A
9	25sq.mm	3 coils	350 strands	91 A

FLEXIBLE TWISTED

FEATURES OF FLEXIBLE WIRES

- Short-Circuit protection
- Low Voltage Drop
- Higher Di-Electric Strength
- Higher Convection of Heat

S No.	Conductor Size	Coils Per Carton	No. of Strands
1	10/76 sq. mm	50 coils	10 strands
2	14/76 sq. mm	50 coils	14 strands
3	23/76 sq. mm	40 coils	23 strands
4	30/76 sq. mm	30 coils	30 strands
5	40/76 sq. mm	20 coils	40 strands



MULTI-CORE ROUND FLEXIBLE WIRE

Input for appliances, multiphase connections, electrical panels etc.

S No.	Conductor Size	No. of Core
1	10/0052 sq.mm	2,3,4,5,6,7
3	23/0052 sq.mm	2,3,4
4	30/0052 sq.mm	2,3,4
5	40/0052 sq.mm	2,3
6	1 sq.mm /0.2	2,3,4,5,6,7
7	1.5 sq.mm /0.2	2,3,4,5,6,7
8	2.5 sq.mm /0.2	2,3,4,5,6,7
9	4 sq.mm	2,3,5
10	6 sq.mm	2,3
11	10 sq.mm	2,3



SUBMERSIBLE 3 CORE FLAT

Submersible Flat Cable. The PVC insulated cable and sheathed 3 core flat cables are used for giving electrical connections to the submersible pump motors. These are manufactured for critical space requirement, protection against indefinite immersion in water under specified conditions, protection against rain water and ingress of small, solid foreign bodies. submersible flat cable

S No.	Conductor Size	Number of Strands
1	1.5 sq.mm	22 strands
2	2.5 sq.mm	36 strands
3	4 sq.mm	56 strands
4	6 sq.mm	84 strands
5	10 sq.mm	140 strands
6	16 sq.mm	224 strands



ALUMINIUM 2 CORE FLAT


Main cable connections for supply of electricity.

S No.	Conductor Size	Gauge of Aluminium
1	1.5 sq.mm	050
2	2.5 sq.mm	062
3	4 sq.mm	072
4	6 sq.mm	095
5	10 sq.mm	125
6	16 sq.mm	180



UNARMoured MULTICORE ROUND


S No.	Conductor Size	No. of Core
1	4 sq.mm	3,4
2	6 sq.mm	3,4
3	10 sq.mm	3,4
4	16 sq.mm	3,4
5	25 sq.mm	3,4
6	35 sq.mm	3

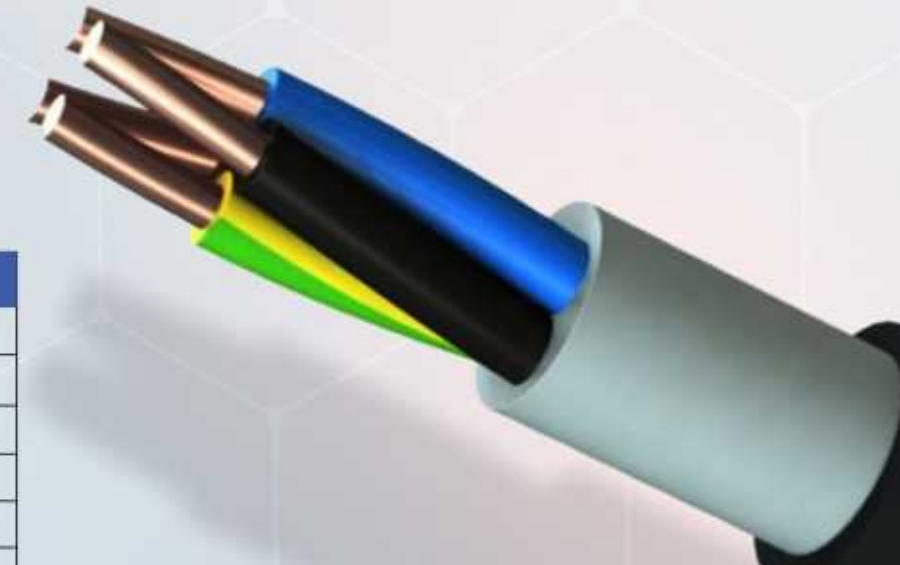

ARMOURED WIRES

Commonly known as SWA cable, the steel wire armoured cable is a power and auxiliary control cable, designed for use in mains supply electricity. The SWA cable can also be referred to mains cable, power cable, armoured cable and booklet-armoured cable.

S No.	Conductor Size	No. of Core
1	10 sq. mm	3,4
2	16 sq. mm	3,4
3	25 sq. mm	3,4

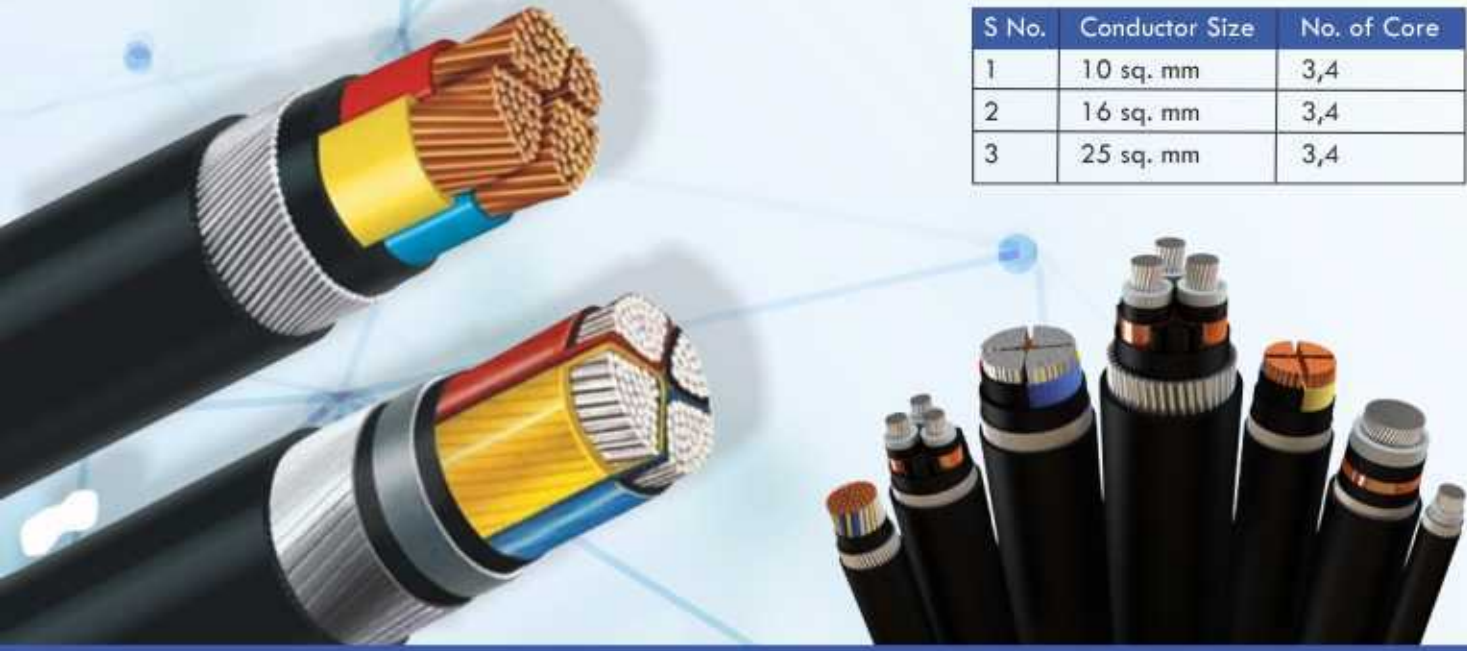

ALUMINIUM SINGLE CORE

A VIR wire mainly consists of a tinned copper conductor/ bare copper/ aluminium conductor having pvc coating.

*Available in 1.5 sq. mm, 2.5 sq. mm, 4 sq. mm, 6 sq. mm, 10 sq. mm, 16 sq. mm, 25 sq. mm & 35 sq. mm.



CO AXIAL WIRE



Used in cable TV operations, Computer net-working etc

LAN WIRE

CAT 5

Category 5 cable, commonly referred to as Cat 5, is a twisted pair cable for computer networks. Cat 5 is also used to carry other signals such as telephony and video

CAT 6


Category 6 cable, commonly referred to as Cat 6, is a standardized twisted pair cable for Gigabit Ethernet and other network physical layers that is backward compatible with CAT5/5e. Cat 6 features more stringent specifications for crosstalk and system noise.



CCTV



CCTV Cables are offered in two types namely 4+1 CCTV Cable and 3+1 CCTV Cable. CCTV cables are designed to optimize the quality of video signals, which are transmitted through the Coaxial cable in the CCTV.



SOLAR CABLE

DC solar cables are used as inter-connection cables for connecting different photovoltaic modules in air or conduit. LT solar AC cables are used for connection of inverter to transformer in air/underground trays whereas HT Solar AC cables are used for connecting transformer to the grid in air/underground trays.



SPEAKER WIRES




This 2core parallel cable consists of transparent PVC and mostly used for connections of almost all kinds of domestic, industrial and commercial purpose speakers.

PARALLEL FLAT WIRES



Parallel flat wire is basically used for all kinds input or out connection at any place where 2 phase supply is needed.




SPECIAL APPLICATION WIRE

Battery wire



Battery cable is used to power your electrical system, specification for electrically conductive cables and are used for connections in batteries of cars, scooters, bus, truck, inverters at home or industrial inverters as well.

Hook up

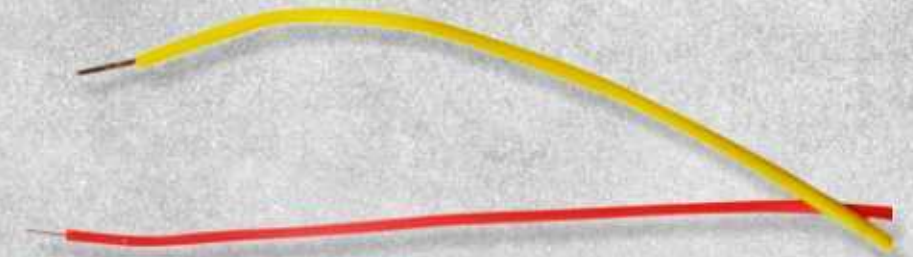

Hook-up wire is frequently used in control panels, automotive, meters, ovens, as internal wiring of computers, electronic equipment, business machines and appliances. The wire is most often used within enclosed electronic equipment.

Choke signage wire



Mainly used for connections in electronic ballasts.

Teflon wire



This kind of wires have high dielectric strength. These are extremely high operating temperatures. Contains low dissipation factor and also unchanged by susceptibility to humidity, liquid, and moisture

2 pin top leads



Used for connections in 2 phase appliances such as coolers, heaters, mixer, hair dryers and all kinds of household and industrial appliances.

Grommet Wires



3 pin top leads




Used for connections in 3 phase appliances such as coolers, heaters, mixer, hair dryers and all kinds of household and industrial appliances.

DC wire




It is made of multiple strands of tinned copper that are bunched together and are used in connection of all the DC appliances and also for connections in solar panels. These wire have a high operational temperature and can resist high temperatures for a very long time and can be exposed to sunlight for up to 15000 Hours.

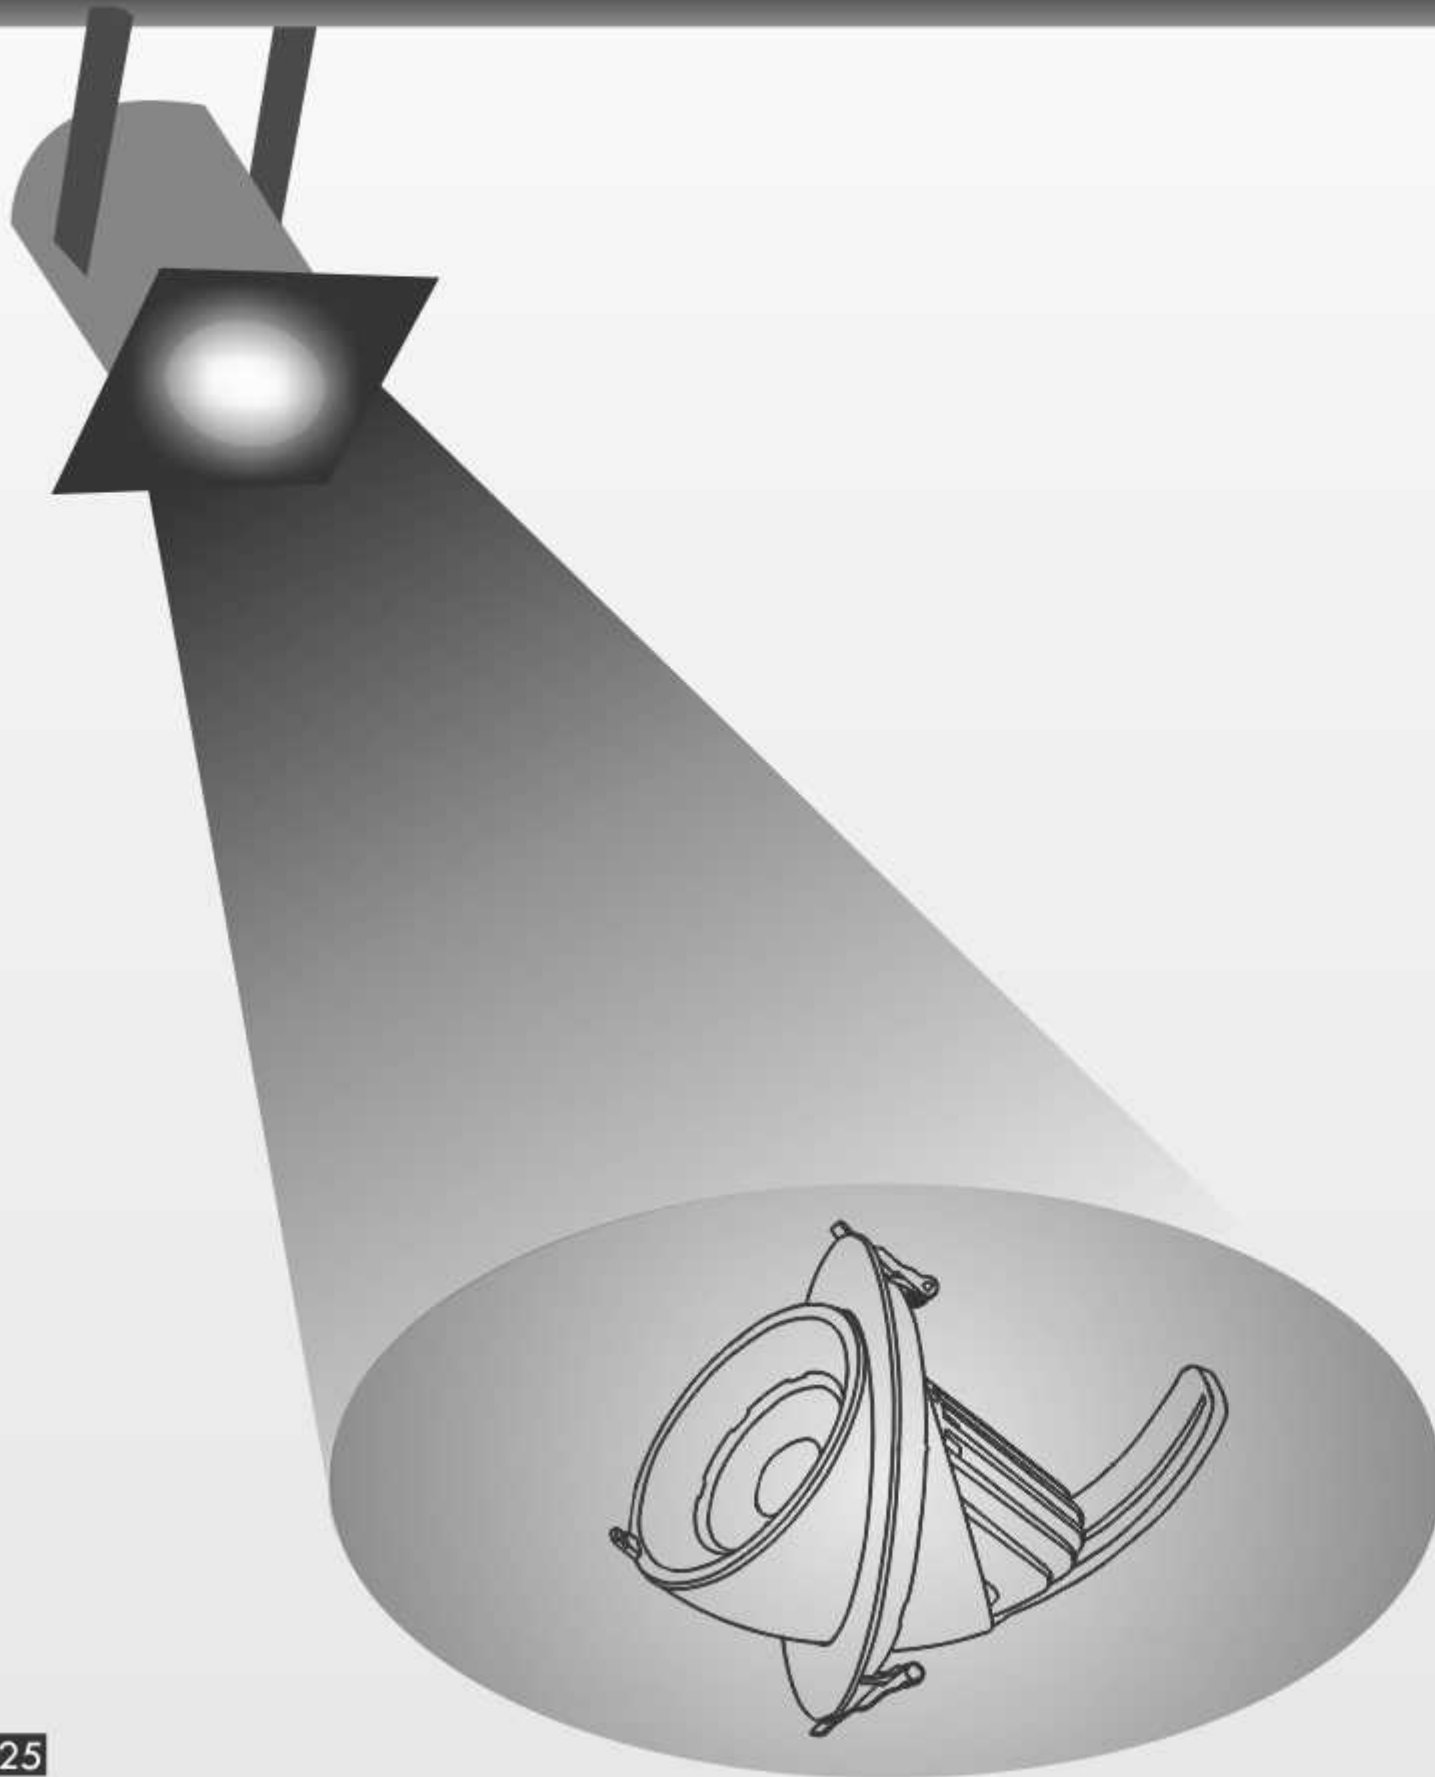

“In the right *light*, at the
right time, everything is
extraordinary”



ARCHITECTURAL LIGHTS



COB Light (Movable)



S no.	Power	Cutout size	Input Voltage	Color	Packaging Per Carton
1	3 watt	50.8 mm/ 2 inch	165-260V	6500K/4000K/3000K	40
2	6 watt	50.8 mm/ 2 inch	165-260V	6500K/4000K/3000K	30
3	12 watt	76.2 mm/ 3 inch	165-260V	6500K/4000K/3000K	30
4	20 watt	96.52 mm/3.8 inch	165-260V	6500K/4000K/3000K	30
5	30 watt	127 mm /5 inch	165-260V	6500K/4000K/3000K	20
6	40 watt	127 mm /5 inch	165-260V	6500K/4000K/3000K	20
7	50 watt	152.4 mm/ 6 inch	165-260V	6500K/4000K/3000K	10

Under water Light IP 68



S No.	Power	Cutout Size	Luminous Flux	Input Voltage	Color Temperature	Power Factor	Packaging Per Carton
1	6 watt		9LM/W	165-265V	White, Warm white, Red Green, Pink , Blue	0.95	40



Rose Gold Cob



S No.	Power	Cutout Size	Input Voltage	Color Temperature	Packaging Per Carton
1	10 watt		160-265V	6500K/4000K/3000K	40
2	16 watt			6500K/4000K/3000K	40

Trim Less COB




S No.	Power	Cutout Size	Input Voltage	Color Temperature	Packaging Per Carton
1	10 watt		160-265V	6500K/4000K/3000K	40
2	16 watt			6500K/4000K/3000K	40





*Be the light you are
looking for and you will
no longer need to
follow it.*



Gate Light




S No.	Power	Cutout Size	Input Voltage	Color Temperature	Packaging Per Carton
1	20 watt		160-262V	6500K/4000K/3000K	10

Up Down Light



S No.	Power	Cutout Size	Input Voltage	Color Temperature	Packaging Per Carton
1	3 watt	(Half)	160-265V	6500K/4000K/3000K	40
2	3+3 watt	(Full)	160-265V	6500K/4000K/3000K	40



Rose Gold surface Cylinder



S No.	Power	Cutout Size	Input Voltage	Color Temperature	Packaging Per Carton
1	12 watt		160-265V	6500K/4000K/3000K	
2	20 watt		160-265V		

Track Light



S No.	Power	Input Voltage	Color Temperature	Power Factor	Packaging Per Carton
1	10 watt	165-260V	6500K/4000K/3000K	0.98	20
2	20 watt	165-260V	6500K/4000K/3000K	0.98	20
3	30 watt	165-260V	6500K/4000K/3000K	0.98	20
4	42 watt	165-260V	6500K/4000K/3000K	0.98	20




Foot Light



S No.	Power	Cutout Size	Input Voltage	Color Temperature	Packaging Per Carton
1	3 watt		160-260V	6500K/4000K/3000K	40

Profile Light

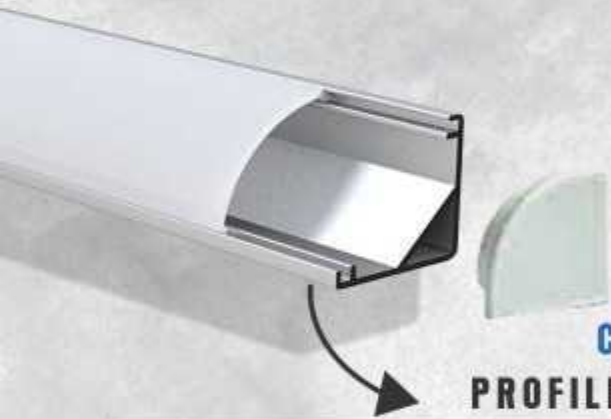

**CORNER
PROFILE LIGHT**

Description	Price Pr Mtr.
16mm X 16mm Corner	65



**CONCEALED
PROFILE LIGHT**

Description	Price Pr Mtr.
17mm X 8mm Recessed	58
17mm X 14mm Recessed	68



**PROFILE LIGHT
RECESSED**

Description	Price Pr Mtr.
17mm X 8mm Surface	55
17mm X 14mm Surface	65
35mm X 35mm Surface	350



Lighting brings warmth and life into a room and can animate and transform even the smallest of spaces.

Linear Light



S No.	Power	Dimension	Input Voltage	Color Temperature	Packaging Per Carton
1	48 wat	35*35*1000mm	160-260V	6500K/4000K/3000K	20


Lazer Light




S No.	Power	Input Voltage	Color Temperature	Power Factor	Packaging Per Carton
1	1LP-2 watt	160-260V	6500K/4000K/3000K	0.98	100
2	2LP-4 watt	160-260V	6500K/4000K/3000K	0.98	50
3	5LP-10watt	160-260V	6500K/4000K/3000K	0.98	50



*The Books
I Have Read Are
The Guiding Street Lights
For My Journey Towards
My Goals.*

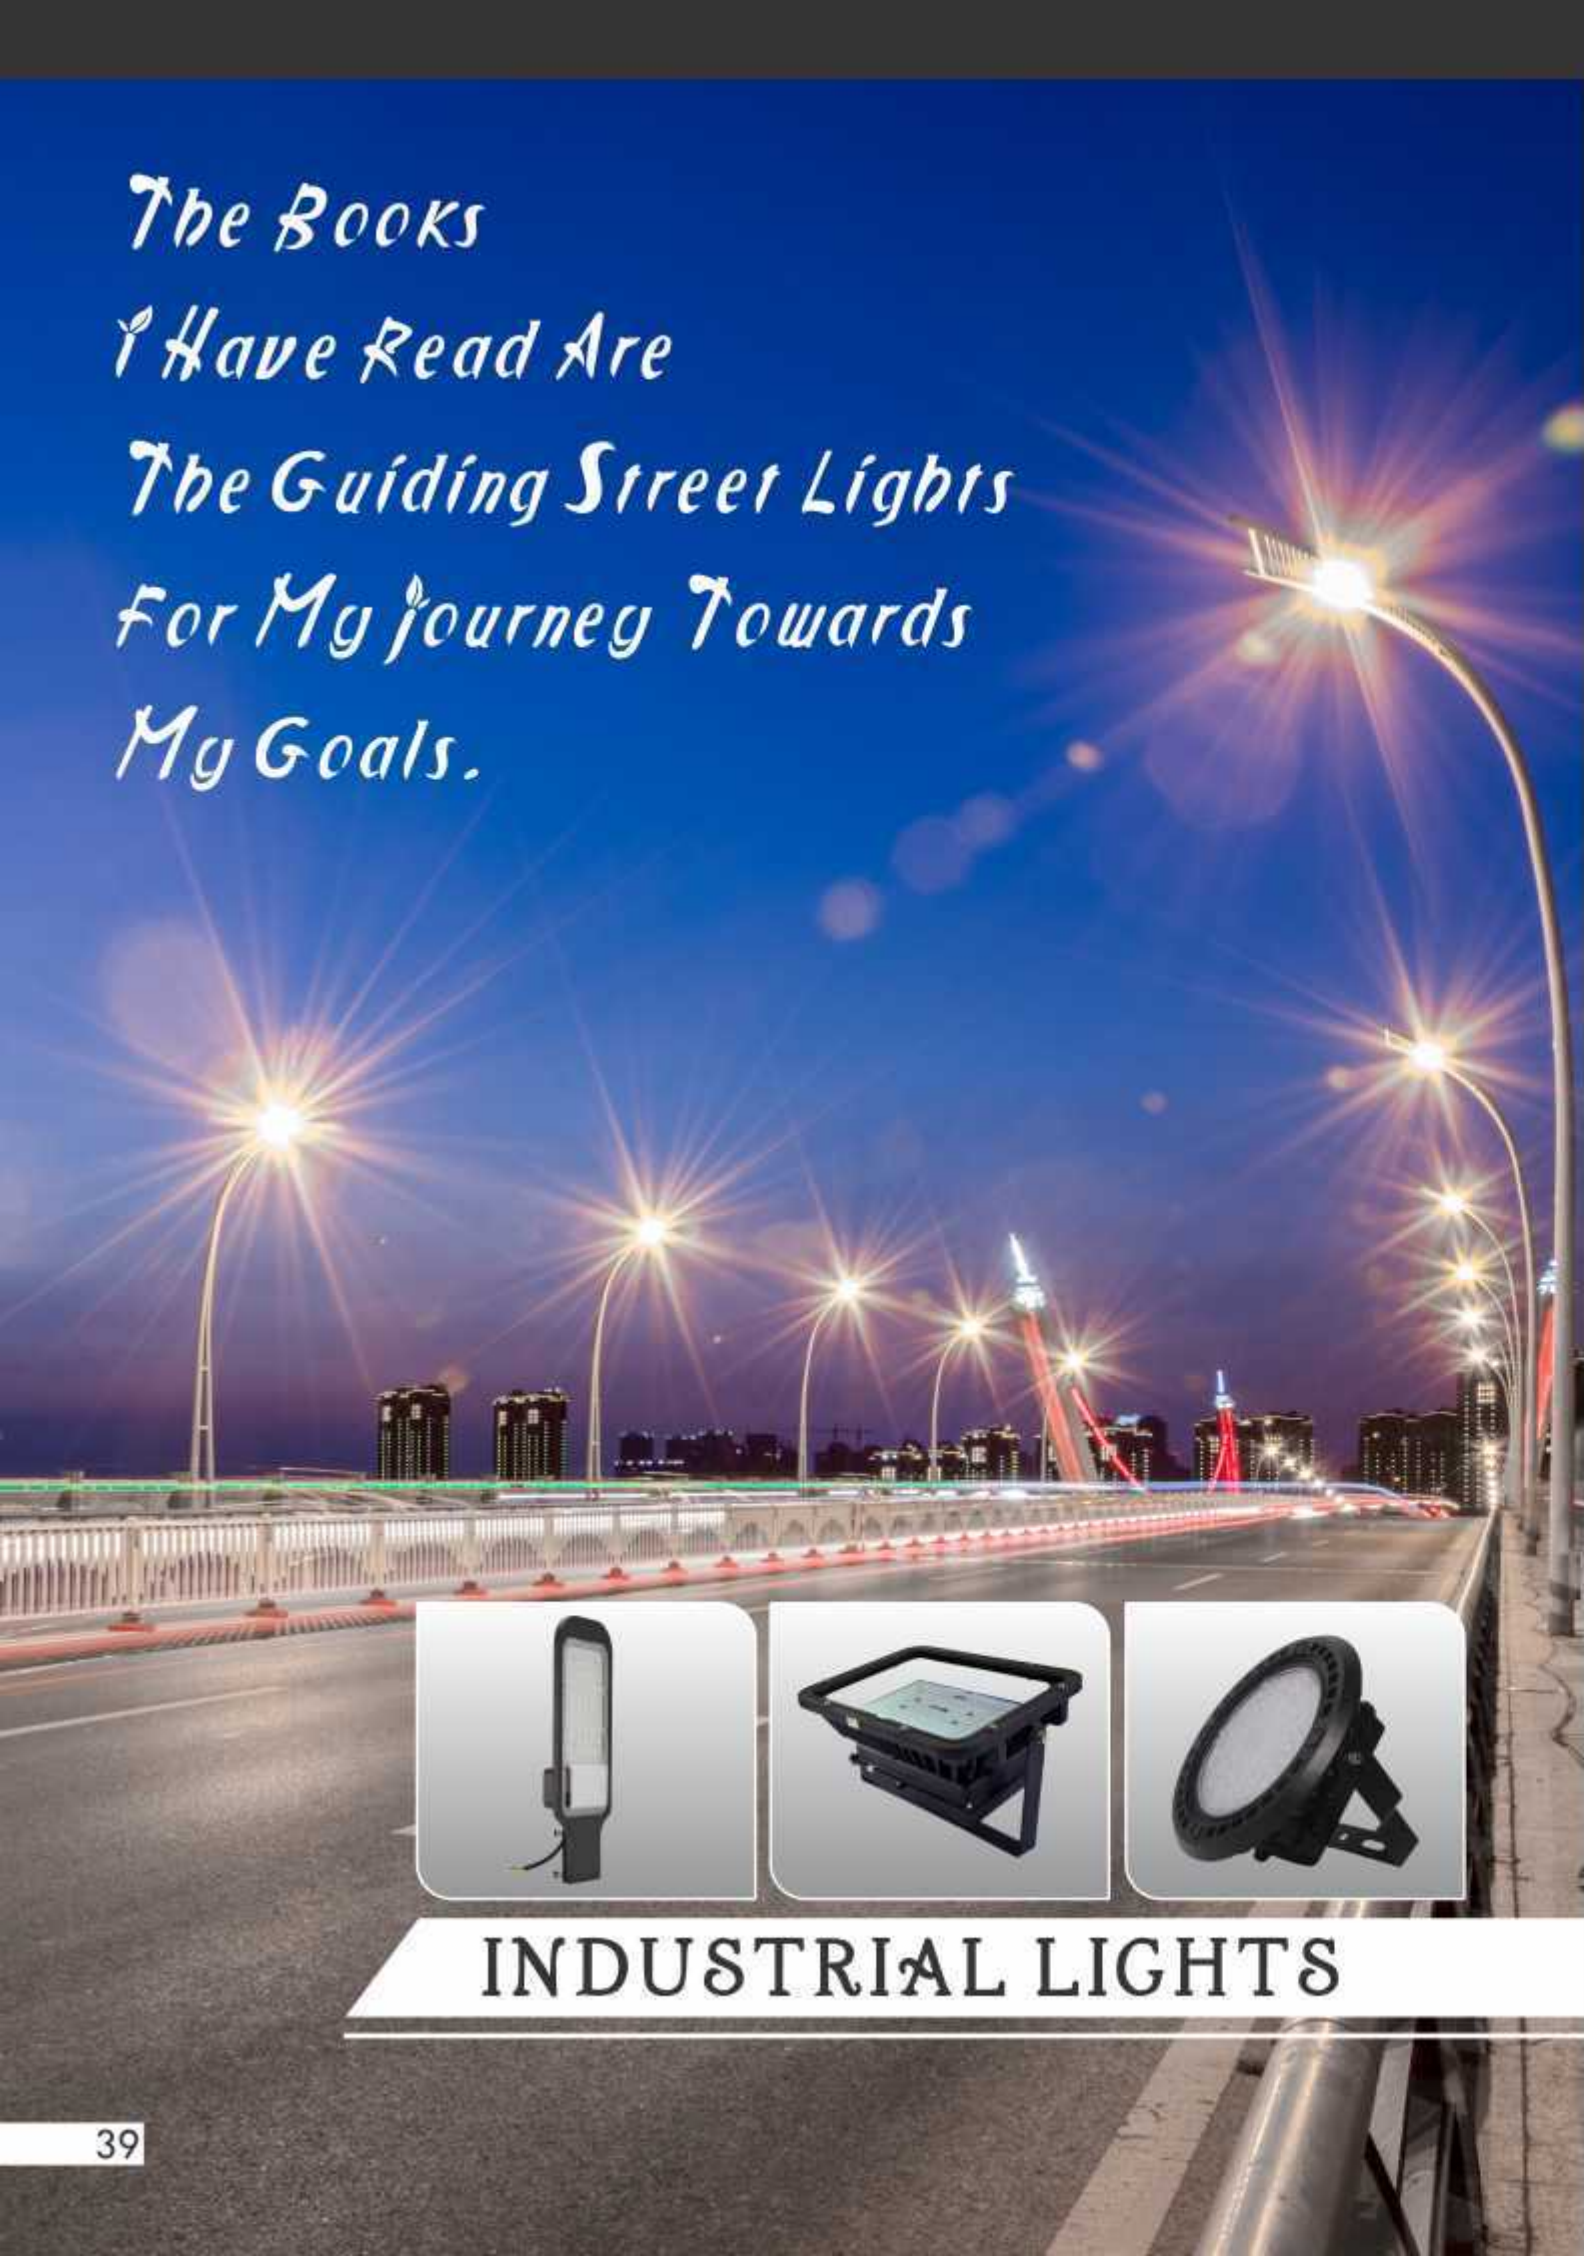

INDUSTRIAL LIGHTS



Street Light-Lens



S No.	Power	Input Voltage	Size	Color Temperature	Packaging Per Carton
1	24watt	165-460V	320x75x70 mm	6500K/3000K	10
2	30 watt	165-460V	320x75x70 mm	6500K/3000K	10
3	48 watt	165-460V	180x270x75 mm	6500K/3000K	10
4	100 watt	165-460V		6500K/3000K	10


Solar Street Light



Collect Beautiful Moments

amazing


There are some moments in our life that are special for us. The right lights make such moments even more memorable. Whether indoor or outdoors, Relco LED lights bring alive the unique moments of your life like never before



Street Light-Glass



S No.	Power	Input Voltage	Size	Color	Packaging Per Carton
1	12 watt	165-260V	320x100x50 mm	6500K/3000K	10
2	18 watt	165-260V	320x100x50 mm	6500K/3000K	10
3	24 watt	165-260V	320x100x50 mm	6500K/3000K	10
4	30 watt	165-260V	330x150x55 mm	6500K/3000K	10
5	36 watt	165-260V	330x150x55 mm	6500K/3000K	10
6	50 watt	165-260V	190x400x65 mm	6500K/3000K	10
7	60 watt	165-260V	190x400x65 mm	6500K/3000K	10
8	80 watt	165-260V	470x235x65 mm	6500K/3000K	10
9	100 watt	165-260V	470x235x65 mm	6500K/3000K	10
10	120 watt	165-260V	470x235x65 mm	6500K/3000K	10
11	150 watt	165-260V	180x270x75 mm	6500K/3000K	10



Flood Light



S No.	Power	Size	Input Voltage	Color Temperature	Packaging Per Carton
1	30 watt	190x170x65 mm	165-260V	Warm white/ White	10
2	50 watt	235x200x70 mm	165-260V	Warm white/ White	10
3	100 watt	285x250x70 mm	165-260V	Warm white/ White	10
4	150 watt	325x300x85 mm	165-260V	Warm white/ White	4
5	200 watt	350x385x95 mm	165-260V	Warm white/ White	4



Be The Light That Helps Others SEE.

No matter what time of the day or night it is, you can liven up your surroundings with superior LED lights. While LED battens are standard fixtures in most homes, opt for Relco products for their higher power saving, uniform light distribution, modern yet lightweight design, and sturdy, durable frames.



Flood Light Backchoke




S No.	Power	Size	Input Voltage	Color Temperature	Packaging Per Carton
1	100 watt	285x235x145 mm	165-260V	Warm white/ White	5
2	400 watt	420x300x145 mm	165-260V	Warm white/ White	5

Flood Light Lens




S No.	Power	Size	Input Voltage	Color Temperature	Packaging Per Carton
1	40 watt		165-260V	Warm white/ White/Red/Green/Blue /Pink	20
2	50 watt		165-260V	Warm white/ White/Red/Green/Blue /Pink	20
3	72 watt		165-260V	Warm white/ White/Red/Green/Blue /Pink	10
4	120 watt		165-260V	Warm white/ White/Red/Green/Blue /Pink	10
5	200 watt		165-260V	Warm white/ White/Red/Green/Blue /Pink	10

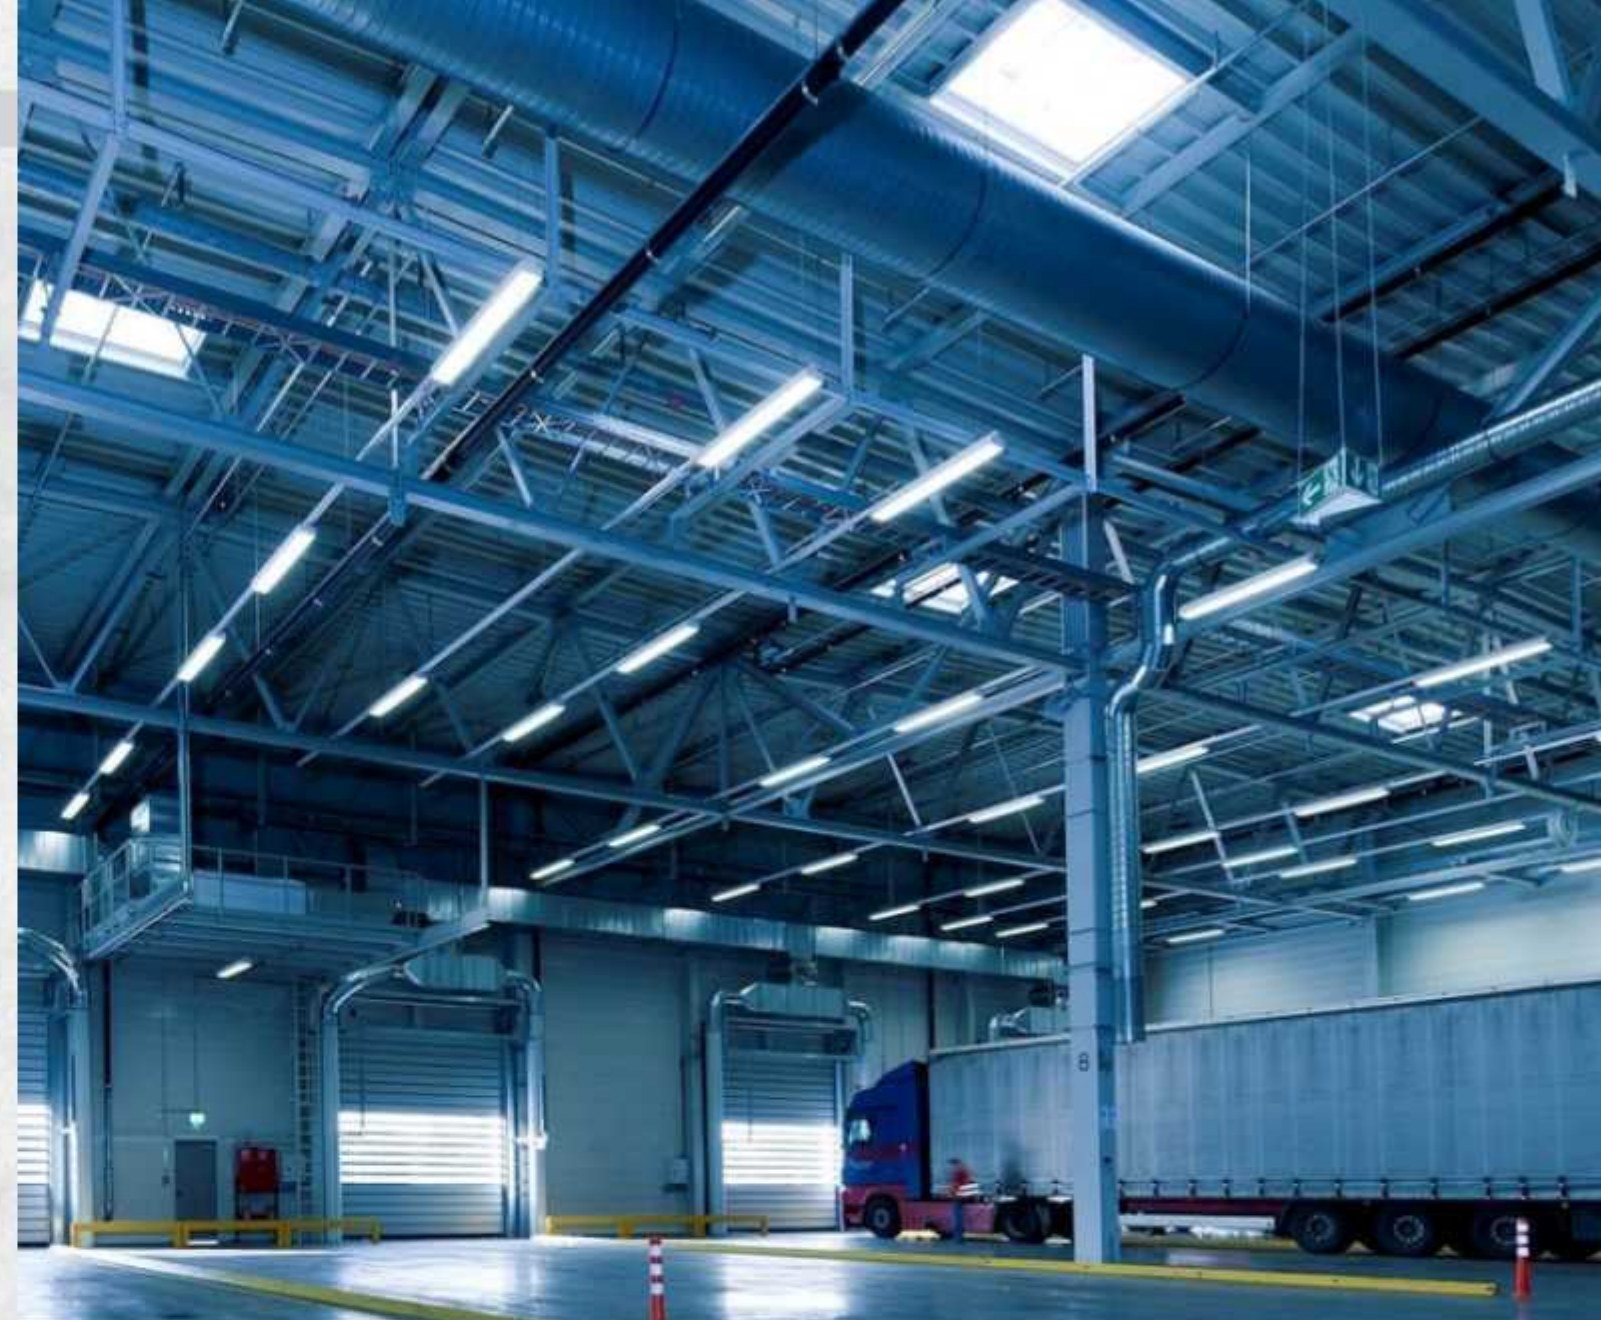

Give Light
and People will find the way

COMMERCIAL LIGHTS



2 x 2 Panel

Also Available In
(1 x 1 Panel)



S No.	Power	Pattern	Input Voltage	Size	Color Temperature	Packaging Per Carton
1	24 watt	2x2 Panel Light	160-260V	595X595X50 mm	6500K-4000K-3000K	6
3	48 watt	2x2 Panel Light	160-260V	595X595X50 mm	6500K-4000K-3000K	6

Hibay Lights



S No.	Power	Input Voltage	Length x Breadth	Color Temperature	Packaging Per Carton
1	50 watt	165-260V	300x300 mm	Warm white, White	1
2	100 watt	165-260V	400x350 mm	Warm white, White	1
3	150 watt	165-260V	400x350 mm	Warm white, White	1
4	200 watt	165-260V	400x350 mm	Warm white, White	1



WE LIGHT YOUR
D R E A M




THE HOME

*Light is
the magical ingredient
that makes or
breaks a space
its one of
the most important
elements in
all my interiors.”*

INDOOR LIGHTS



Aluminium Panels

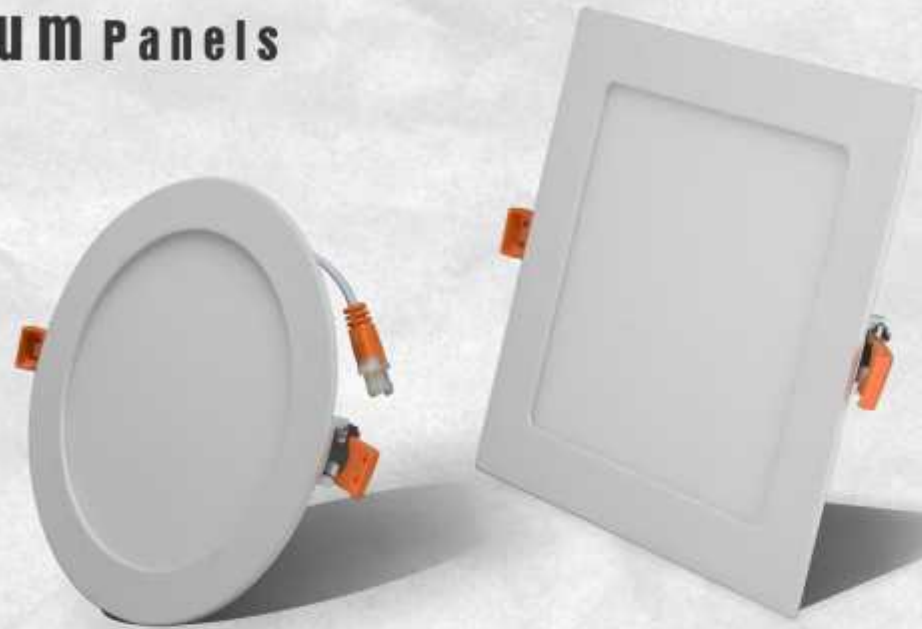


S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	3 watt	160-260V	76.2 mm/ 3 inch	6500K/4000K/3000K	50
2	6 watt	160-260V	101.6 mm/4 inch	6500K/4000K/3000K	40
3	9 watt	160-260V	127 mm/ 5 inch	6500K/4000K/3000K	30
4	12 watt	160-260V	152.4 mm/ 6 inch	6500K/4000K/3000K	30
5	18 watt	160-260V	203.2 mm/ 8 inch	6500K/4000K/3000K	30

Aluminium surface



S No.	Input Power	Input Voltage	Dimension	Color Temperature	Packaging Per Carton
1	6 watt	90-300 V	101.6 mm/ 4 inch	6500K/4000K/3000K	40
2	12 watt	90-300 V	152.4 mm/6 inch	6500K/4000K/3000K	30
3	18 watt	90-300 V	203.2 mm/ 8 inch	6500K/4000K/3000K	30





Slim Panel (S series)



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	8 watt	165-265V	101 mm/4 inch	6500K/4000K/3000K	40
2	12 watt	165-265V	125mm/ 5 inch	6500K/4000K/3000K	30
3	15 watt	165-265V	152 mm/6 inch	6500K/4000K/3000K	30
4	22 watt	165-265V	203mm/8 inch	6500K/4000K/3000K	30

S Series surface



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	6 watt	165-265V	101 mm/4 inch	6500K/4000K/3000K	40
2	12 watt	165-265V	152mm/ 6 inch	6500K/4000K/3000K	30
3	18 watt	165-265V	203 mm/8 inch	6500K/4000K/3000K	30



CURVE Panel



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	3 watt	160-260V		6500K/3000K	50
2	6 watt	160-260V		6500K/3000K	40
3	9 watt	160-260V		6500K/3000K	30
4	12 watt	160-260V		6500K/3000K	30
5	18 watt	160-260V		6500K/3000K	30

LL (Ling Long) surface Panel



S No.	Input Power	Input Voltage	Dimension	Color Temperature	Packaging Per Carton
1	6 watt	160-260 V	88.9 mm/ 3.5 inch	6500K/4000K/3000K	40
2	12 watt	160-260 V	114.3 mm/ 4.5 inch	6500K/4000K/3000K	30
3	18 watt	160-260 V	139.7 mm/ 5.5 inch	6500K/4000K/3000K	30



A ROOM IS
NOT ROOM
WITHOUT
NATURAL
LIGHT

PC Glory surface




S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	8 watt	160-260V	90 mm	Warm white/White/ Red/ Green/ Pink/ Blue	100
2	15 watt	160-260V	150 mm	Warm white/White/ Red/ Green/ Pink/ Blue	50

Goldmedal surface



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	8 watt	160-260V		Warm white/White/ Red/ Green/ Pink/ Blue	
2	15 watt	160-260V		Warm white/White/ Red/ Green/ Pink/ Blue	

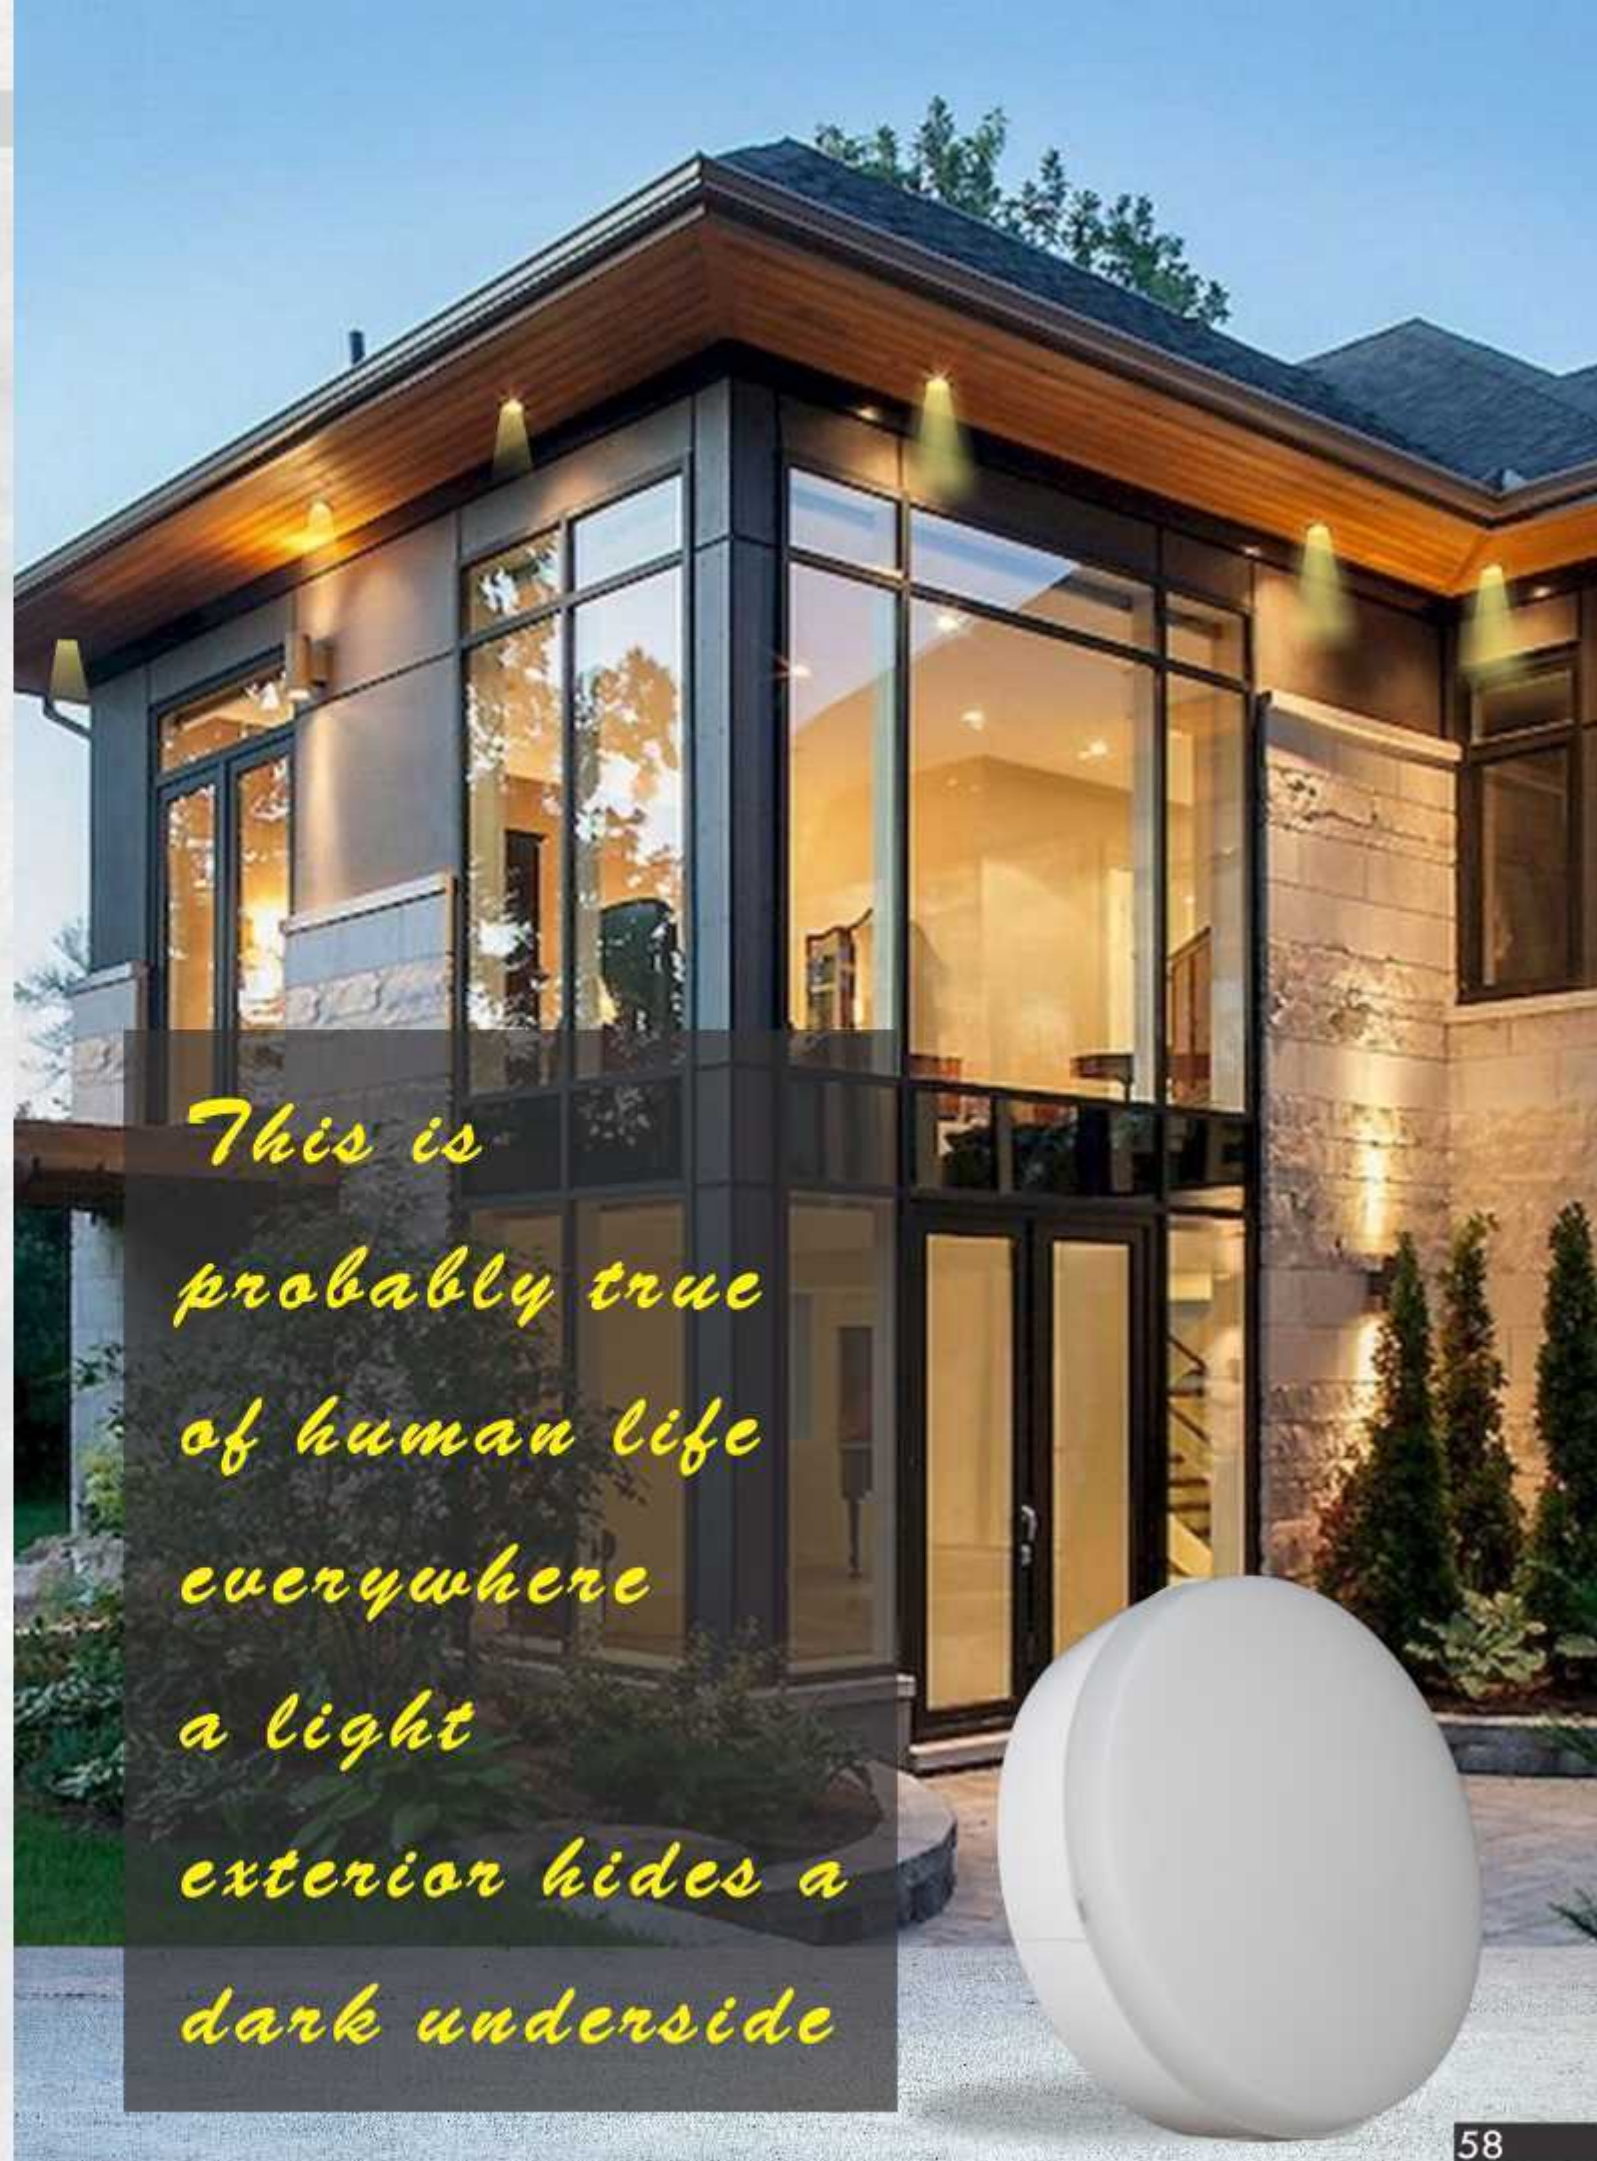

*This is
probably true
of human life
everywhere
a light
exterior hides a
dark underside*

Adjustable cutout Panel



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	12 watt	160-260V	2.5*4 inch	Warm white/White/ Red/ Green/ Pink/ Blue	100
2	18 watt	160-260V	2.5 * 4 inch	Warm white/White/ Red/ Green/ Pink/ Blue	50

Junction Lights

Deep Light-Shine



S No.	Input Power	Input Voltage	Cutout size	Color Temperature	Packaging Per Carton
1	6 watt	160-260 V	38.1 mm/ 1.5 inch	Warm white/White/ Red/ Green/ Pink/ Blue	100
2	15 watt	160-260 V	38.1 mm/ 1.5 inch	Warm white/White/ Red/ Green/ Pink/ Blue	50



Junction Lights

Deep Junction Light



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	3 watt	160-260V	38.1 mm/1.5 inch	Warm white/White/ Red/ Green/ Pink/ Blue	100

Concealed Lights

Aluminium Downlight



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	6 watt	160-260V	76mm/3 inch	Warm white/White/ Red/ Natural White/Green/ Pink/ Blue	50



Concealed Lights

Joy



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	6 watt	160-260V	76.2mm/3 inch	Warm white/White/ Red/ Natural White/Green/ Pink/ Blue	50


Nexa

Concealed Lights




S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	6 watt	160-260V	76.2mm/3 inch	Warm white/White/ Red/ Natural White/Green/ Pink/ Blue	50





*Life and light
made up the interior,
the realm of daytime.
The exterior was
darkness
and
Night*



LENS COB




S no.	Input power	Input Voltage	Cutout size	Color temperature	Packaging per carton
1	3 watt	160-260V	2 Inch	Warm white/ White/Natural white/Red/ Green/ Pink/ Blue	100
2	6 watt	160-260V	3 inch	Warm white/ White/Natural white/Red/ Green/ Pink/ Blue	50
3	15watt	160-260V	4 Inch	Warm white/ White/Natural white/Red/ Green/ Pink/ Blue	50

Bullet Light



S No.	Input Power	Input Voltage	Cutout Size	Color Temperature	Packaging Per Carton
1	3 watt	160-260V	1.2 inch	Warm white/White/ Red/ Natural White/Green/ Pink/ Blue	100

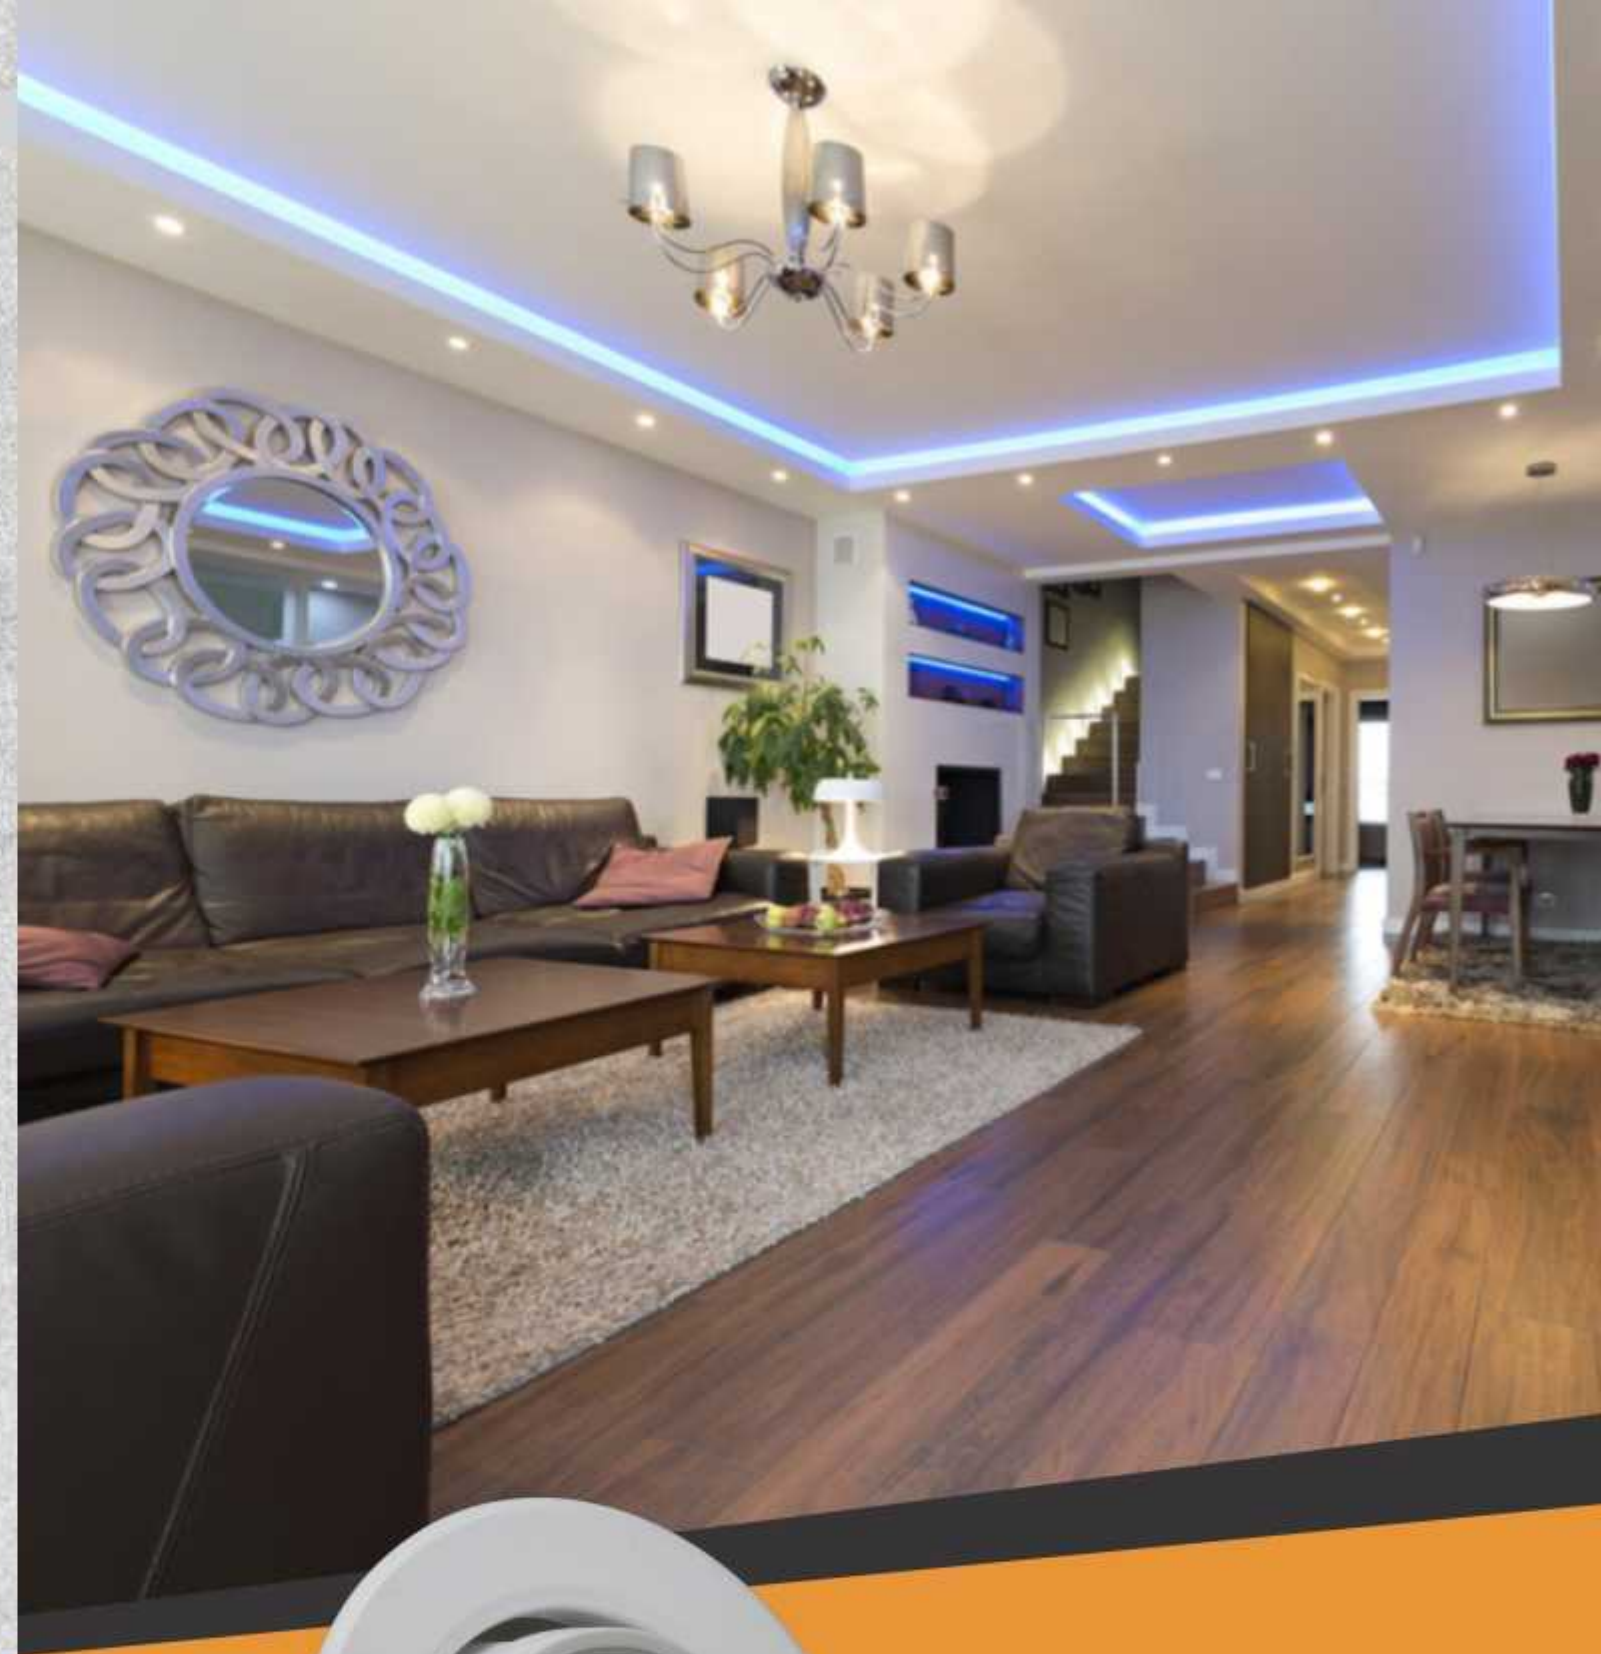

Bulkhead



S No.	Input Power	Input Voltage	Dimensions	Color Temperature	Packaging Per Carton
1	10 watt	160-260V		Warm white / White / Natural white	40
2	20 watt	160-260V		Warm white / White / Natural white	40

T Bulbs



S No.	Input Power	Input Voltage	PF	Color Temperature	Packaging Per Carton
1	10 watt	160-260V	0.98	Warm white / White / Red / Natural White / Green / Pink / Blue	25 X 8 pieces

Tubelight



S No.	Power	Input Voltage	Length	Color Temperature	Packaging Per Carton
1	10 watt	160-260V	585x21x37 mm	Warm white / White	50
2	20 watt	160-260V	1170x21x37mm	Warm white / White	20
3	24 watt	160-260V	1170x21x37mm	Warm white / White	20
4	36 watt	160-260V	1170x21x37mm	Warm white / White	20

